



# Front Press Range



# HE-VA Front-Pakker

*- Cuts its way through the clods and consolidates on heavy or light land*


Sharp 30 degree Front-Pakker rings give an excellent cutting action whilst having the weight to consolidate in front of a powered or passive drill combination.

The 150mm to 165mm spacing between rings ensures there is some friable soil left for the drill to work. Whichever size of packing ring you choose to suit your land, they all employ a unique shoulder design which prevents the rings from sinking in too much on light land and still allows the aggressive 30 degree edge to do its work on heavier ground.

700, 800, 900 mm ring OR MULTI-RING

HE-VA Front-Pakker comes in a choice of 3 ring sizes or a combination of 2 different ring sizes for the maximum effect.

## EVEN CONSOLIDATION ACROSS FULL WIDTH

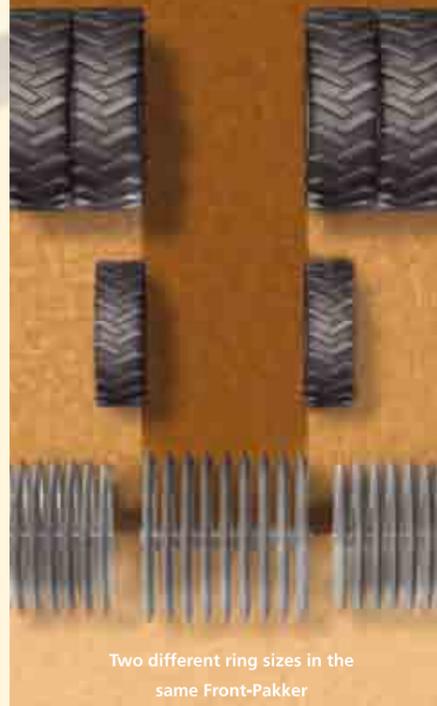

Two different ring sizes in the same Front-Pakker

- The 700 mm and 800 mm rings give good all-round pressing on light, medium and heavy soils and yet have a low rolling resistance due to their weight to diameter ratio and the shoulder profile.
- 900 mm ultra heavy-duty rings are designed to crack, fissure and break down even the heaviest ground or give extra consolidation in light land.
- Multi-ring combinations give you full width action with increased consolidation between the tractor wheels, so that when the tractor tyres have pressed the land, it is left evenly consolidated right across the width, presenting the drill with a more even seedbed and resulting in better crop establishment.




Multi-ring Front-Pakker



Front-Pakkers are available as rigid 1.5 m, 1.65 m, 2.6 m, 3.0 m and 4.0 m units or as 4.0 m, 5.0 m and 6.0 m hydr. folding units.

All Front-Pakkers incorporate a cleaning chain between the rings to ensure the ring keeps working in wet sticky conditions.



## SHOULDER PROFILE



HE-VAs unique shoulder profile offers superb cutting action with its 30 degree edge whilst at the same time controlling the penetration on lighter land with the shoulder at the base of the cutting edge. This improves consolidation and keeps the ring turning on lighter land without



compromising the aggressive action needed for heavier land.

## FULL WIDTH LEVELLING

Fitting a 3 m or 4 m Spring-Board on a 1.5 / 1.65 m Front-Pakker allows the whole width to be levelled and cultivated whilst the Front-Pakker presses in between the tractor wheels, and the tractor wheels/twin wheels press the rest of the working width.



4 m Spring-Board for 1.65 m Front-Pakker has as standard mechanical change-over into a transport width of 2.85 m.

All HE-VA Front Presses give you . . .

Category II three point linkage headstock with integrated steering



## STEERING

The long Front Press headstock becomes an extension of the front of the tractor when attached and hence the press is actually trailed rather than pushed ensuring that the Front Presses follow the nose of the tractor steering smoothly even at speed. The steering rollers (pictured below) self-centre the press to prevent it swaying around when lifted to turn on the headland or in transport.

## HEAVY DUTY HEADSTOCK

As with all HE-VA Front Presses, the headstock is designed to cope with the heaviest ring combination and attachment of a front harrow or a Spring-Board.



## BUSHES

To increase the service life of the Front Presses, they are equipped with bushes for pins, locked by the ring split.



# HE-VA Front-Roller

The HE-VA Front-Roller uses Cambridge or Crosskill rings to give even full width pressing suitable for light to medium soil types. The Front-Roller can also be equipped with V-profile rings suitable for stony and heavy soils. Add the full width Spring-Board to increase the cultivation action, improve levelling and save time and money preparing the ideal seedbed.

510 mm or 620 mm Cambridge rings are suitable for cracking of clods and consolidation of the upper 10 cm soil. The rings ensure an excellent consolidation and an even surface. The serrated rings improve aggression in heavier land and keep the press clean when the going gets sticky.

The 485/530 mm & 550/600 mm Crosskill rings aggressively work the soil leaving small clods on the surface and a fine tilth at seed depth to optimize germination and reduce capping and wind blow. To prevent the rings being clogged with soil, every two rings are movable on a loose hub obtaining the same radius against the soil and the same soil consolidation as well. The soil does not stick to the rings as the loose rings are pressed upwards, making the self-cleaning better.



# V-profile



The V-profile Front-Roller incorporates the new pressed steel V-profile ring developed for the Disc-Roller. This strong V-profile ring is produced of pressed 5 mm steel plates - castellated - forming the aggressive profile. Hereby a totally new strength level for packing rings is achieved and these rings are ideal for stony fields.

The rings can turn individually but are linked by a series of lugs that ensure they all drive together and continue to turn in wet and sticky conditions.

The good strength qualities, its high weight together with the steel scrapers between the rings, make this ring highly suitable for sticky and clayey soils.

The V-profile Front-Roller can be fitted with HE-VAs various front implements such as Spring-Board, Front-harrow, Double frame etc.




1.5 m, 2.6 m, 3.0 m and 4.0 m working widths are available as rigid machines and 4 m, 5 m and 6 m as hydraulic folding machines.


# Folds in seconds!

Simple, safe folding - what else do you expect from a HE-VA

## FOLDING SEQUENCE 3 SECTION TIP-ROLLER

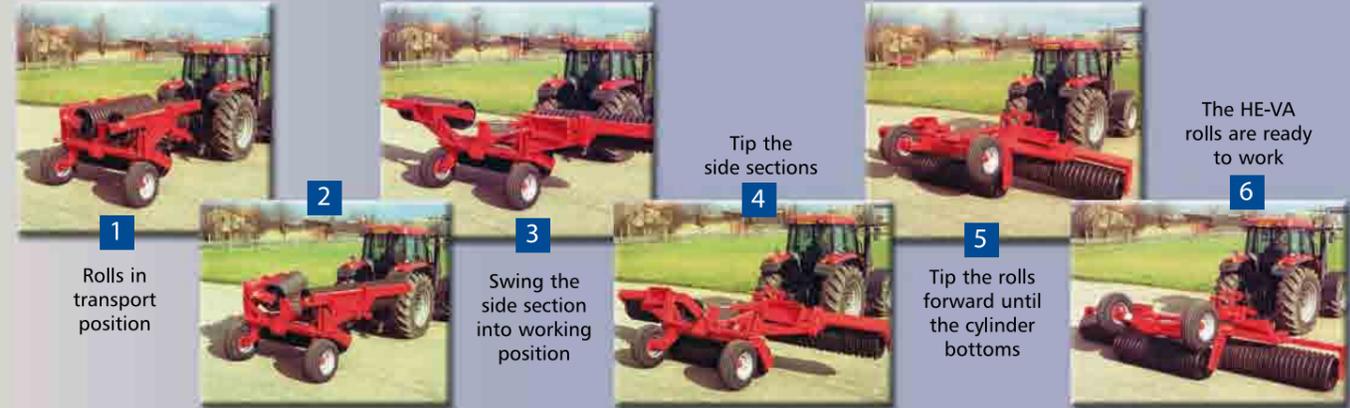

## FOLDING SEQUENCE 5 SECTION SWING-ROLLER

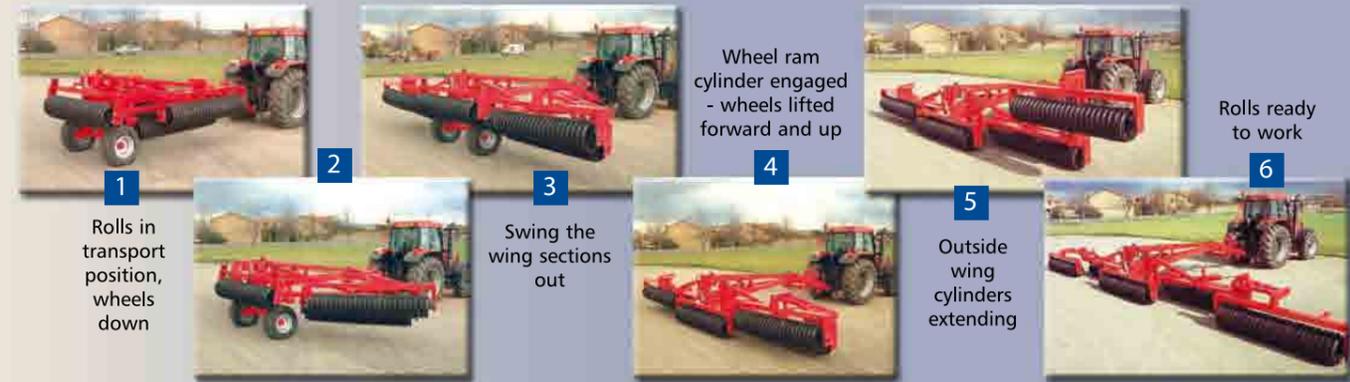

## SAFE TRANSPORT AND STORAGE



A locking pin secures each wing for transport on 5 section swing rollers.



HE-VA 3 section rolls design supports the side section horizontally in a positive locking cradle reducing noise when travelling.



In the completely folded position the weight of the wings is carried between the tractor and transport wheels improving stability.

## OPTIONS



5 Section rolls have an optional auto-lock system. This operates automatically when the wing section is moved in and out of transport.



Mounting set allows HE-VA Multi-Seeder to be fitted for seeding Oilseed Rape, Stubble Turnips, Grass Seed and other small seeds or Slug Pellets.



Optional Tractor Wheel Eradicator for use on ploughing in front of Rolls fitted with Shattboards, lifts out the tractor wheelings.

Individual steel sprign scrapers extend virtually to the hub of the ring ensuring the press keeps turning even in the wet



Front-Roller here with Cambridge rings and Spring-Board.



## CHOICE OF RINGS

Specify the rings to suit the job in hand. HE-VA is producing the requested Front-Roller to improve cultivation, levelling or both.

Cambridge 510 mm



510 mm or 620 mm Cambridge rings giving excellent full width consolidation.

Cambridge 620 mm



485/530 mm & 550/600 mm Crosskill rings giving an aggressive grinding action and good consolidation.

Crosskill 485/530 mm 550/600 mm



620 mm V-profile rings giving a perfect surface finish.

V-profile



Other ring types are available for specific applications for example Cam rings, Corrugated rings and Plain rings.

Other options include: Spring-Board, Road lights, Hydraulic or Air brakes and Drawbar extensions.

## FRONT-PAKKER SPECIFICATIONS

Type	Working width m	Transport width m	Ring diameter mm	No. of rings	Weight kg	
					Without Spring-Board	With Spring-Board
Front-Pakker	1.50	1.50	700	10	680	885(3m S-B)
	1.50	1.50	800	10	890	1095(3m S-B)
	1.65	1.65	900	10	1140	1345(3m S-B)
	2.60	2.60	700	16	866	1051
	2.60	2.60	800	16	1230	1415
	2.60	2.60	900	14	1685	1870
	3.00	3.00	700	18	980	1185
	3.00	3.00	800	18	1420	1625
	3.00	3.00	900	17	1940	2145
	4.00	4.00	700	24	1280	1540
	4.00	4.00	800	24	1840	2100
	4.00	4.00	900	23	2415	2675
	4.00 hydr.	2.55	700	24	1430	1890
	4.00 hydr.	2.65	800	24	1990	2450
	4.00 hydr.	2.75	900	21	2580	3040
	5.00 hydr.	2.55	700	30	1655	2170
	5.00 hydr.	2.65	800	30	2350	2865
	6.00 hydr.	2.55	700	36	1875	2445
6.00 hydr.	2.65	800	36	2695	3265	
Multi ring Front-Pakker	3.00	3.00	700/800/700	18	1160	1365
	3.00	3.00	800/900/800	17	1610	1815
	4.00	4.00	700/800/700	24	1460	1720
	4.00	4.00	800/900/800	23	2030	2290
	4.00 hydr.	2.55	700/800/700	24	1610	2070
	4.00 hydr.	2.65	800/900/800	21	2180	2640
	5.00 hydr.	2.55	700/800/700	30	1835	2350
6.00 hydr.	2.65	700/800/700	36	2095	2665	

## FRONT-ROLLER SPECIFICATIONS

Working-width m	Transport-width m	Ring type	Ring diameter mm	No. of rings	Weight kg	
					Without Spring-Board	With Spring-Board
1.50	1.50	Cambridge	510	29	615	820(3m S-B)
1.50	1.50	Cambridge	620	29	760	965(3m S-B)
1.50	1.50	Crosskill	485/530 / 550/600	15	550 / 740	755(3m S-B) / 945
1.50	1.50	V-Profile	600	12	570	775(3m S-B)
2.60	2.60	Cambridge	450	47	790	995
2.60	2.60	Cambridge	510	47	930	1115
2.60	2.60	Cambridge	620	47	1160	1345
2.60	2.60	Crosskill	485/530 / 550/600	25	730 / 1045	915 / 1100
2.60	2.60	V-Profile	600	19	850	1035
3.00	3.00	Cambridge	450	55	900	1105
3.00	3.00	Cambridge	510	55	1060	1265
3.00	3.00	Cambridge	620	55	1330	1535
3.00	3.00	Crosskill	485/530 / 550/600	27	830 / 1170	1035 / 1375
3.00	3.00	V-Profile	600	23	970	1175
4.00	4.00	Cambridge	450	75	1280	1540
4.00	4.00	Cambridge	510	75	1505	1765
4.00	4.00	Cambridge	620	75	1875	2135
4.00	4.00	Crosskill	485/530 / 550/600	37	1210 / 1675	1470 / 1935
4.00	4.00	V-Profile	600	31	1385	1645
4.00 hydr.	2.51	Cambridge	510	75	1655	2115
4.00 hydr.	2.62	Cambridge	620	75	2025	2485
4.00 hydr.	2.62	Crosskill	485/530 / 550/600	37	1360 / 1830	1820 / 2290
4.00 hydr.	2.60	V-Profile	600	30	1535	1995
5.00 hydr.	2.76	Cambridge	510	105	1955	2470
5.00 hydr.	2.87	Crosskill	485/530 / 550/600	47	1590 / 2180	2105 / 2695
5.00 hydr.	2.90	V-Profile	600	38	1805	2320
6.00 hydr.	2.76	Cambridge	510	115	2348	2918
6.00 hydr.	2.87	Crosskill	485/530 / 550/600	57	1905 / 2625	2475 / 3195
6.00 hydr.	2.90	V-Profile	600	46	2170	2740

# HE-VA

N. A. Christensensvej 34  
DK-7900 Nykøbing Mors  
Tel: +45 9772 4288  
Fax: +45 9772 2112

Email: [info@he-va.com](mailto:info@he-va.com)  
Web: [www.he-va.com](http://www.he-va.com)

**EuroAgri**  
Importers of Machinery Excellence

50 Methven Highway,  
RD6, Ashburton, 7776  
New Zealand

P: 03 307 7445  
M: 027 782 7606  
E: [info@euroagri.co.nz](mailto:info@euroagri.co.nz)  
W: [www.euroagri.co.nz](http://www.euroagri.co.nz)

## HE-VA PRESS-ROLLER

Where a precisely uniform consolidation between the tractor's tyres and either side of the tractor wheels is requested, the Press-Roller with rubber wheels will be the ideal solution.

The 4.0 m model is equipped with a wheel on both sides consolidating the soil outside the area where the tractor's wheels and/or twin wheels will consolidate.

Press-Roller is a self-governing wheel packer where the wheels are mounted on a 60 mm axle. Can be equipped with weight console set for additional weight. The Press-Roller is available with Spring-Board, Front-harrow etc., compare the page concerning Options.



Working width m	Transport width m	Wheel dia. mm	No. of wheels	Weight
1.5	1,5	760	4	470
4.0	4,0	760	1+4+1	705
4.0 hydr.	2,4	760	1+4+1	795

Wheel dimension: 10.0/75 x 15.3

## FRONT-LINKAGES

To get the best out of any front equipment you need the best front-linkage. The HE-VA range is substantial - from 1500 to 5500 kg lifting capacities with linkages and PTOs to fit most models of tractors. The close coupled linkage design features vertical fold link arms and a soft start PTO system.



Due to our company policy of continual improvement we reserve the right to change specifications without notice. E. & O.E.