

# TRUCK MOUNTED SPREADERS

Trusted machinery from trusted people.





### THE EUROAGRI STORY

EuroAgri are the exclusive New Zealand importers, dealers and service agents for the leading European brand Bredal.

EuroAgri has developed and maintained a reputation of excellence, not only by the quality of the machines we stand by, but also by the service we provide.

Connecting farmers and contractors with leading European equipment that combines innovation and excellence, with an unsurpassed suitability for our conditions is one of our key goals.

At EuroAgri we have four people to carry out Spread Mark Certification. We believe in providing excellence and constantly enhancing our operations to the benefit of our clients.

### WHY ARE BREDAL TRUCK MOUNTED SPREADERS THE MARKET LEADERS?

Simply with an international reputation for accuracy & durability, Bredal has proven time & again to be a machine Farmers & Contractors can depend on – day after day, year after year.

- Bredal endeavours to manufacture spreaders with the simplest possible design & adjustment requirements
- 12-24m 4 vane disc spreading system
- 12-36m 6 vane disc + super wide
- Hopper extension
- Optional cover over spreader system
- Electronic controlled headland spreading system

### COMPATIBLE WITH THE LATEST VARIABLE RATE TECHNOLOGY

MODEL	CAPACITY (LITERS)	SPREADING CAPACITY	WORKING WIDTH
K45	up to 5000	1600kg per min	up to 36m
K65	up to 6500	1600kg per min	up to 36m
K85	up to 8500	1600kg per min	up to 36m
K105	up to 11500	1600kg per min	up to 36m
K135	up to 15500	1600kg per min	up to 36m







### **BREDAL KEY FEATURES**

# SPREADER DISCS

• The standard S spreader system is fitted with spreader discs for spreading fertilizer up to 36m & lime up to 16m

### **SPREADER DISCS**



 A double overlap offers a greater degree of certainty when spreading at varying wheel track distances & at a variable pto speed

### **GRATE CENTRE SUPPORT**



- Bin grates centre support
- K85 model shown

### **6 VANE DISC + SUPER WIDE**




 The H disc is designed for spreading of products where extra spread width is required with excellent results achieved

### **REAR HATCH**



- The rear hatch is fed by plastic guides, which ensures that the rear hatch will work even if the spreader is fully loaded
- A hydraulic rear hatch is also available
- Optional stainless hatch

### **HEADLAND SPREADING**



- A headland spreader (optional extra) is available for headland spreading which reduced the RPM on the left spreader disc, whilst maintaining the RPM on the right
- A headland device is available for headland spreading at 12-28m & at 28-36m

### **AG LEADER IN COMMAND 1200**




- Gives complete machine control including rate and spinner speed
- Full variable rate spreading capability and proof of placement

## **CUSTOMERS CHOICE OF COMPUTER**



TECHNICAL DATA								
	K45	K65	K85	K105	K135			
Capacity (level measure)	$3.5 m^3$	5m³	6.6m³	9m³	13.5m³			
With extension (level measure)	5.0m³	6.5m³	8.5m³	11.3m³	15.5m³			
Hopper length	290cm	300cm	395cm	420cm	578cm			
Hopper width	180cm	200cm	200cm	220cm	220cm			
Total length	420cm	430cm	525cm	535cm	700cm			
Maximum width	230cm*	252cm*	265cm*	288cm*	290cm*			
Std spreader transition	Hydraulic drive							

# **BREDAL'S SUPERIOR SPREAD WIDTH**

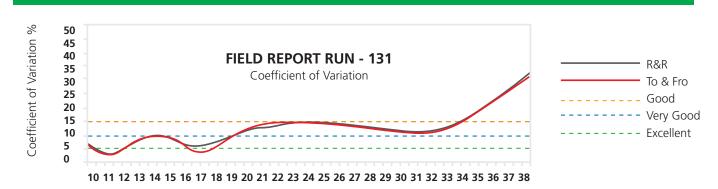

Bout Width (m)

